


SWIVEL NUT BALL VALVE

Kit FI Lead Free



Product Specifications

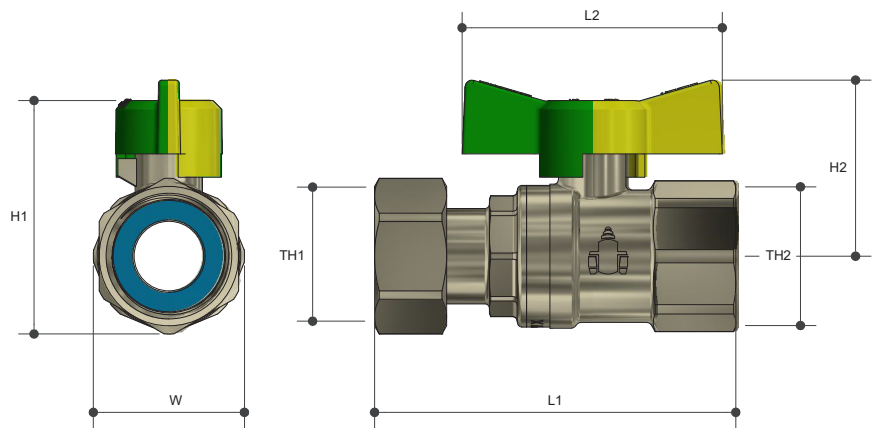

Specifications

Working Temperature
Water: 1°C to 95°C | Gas: -20°C to 120°C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

| | L1 | L2 | H1 | H2 | W | TH1 | TH2 |
|--------|----|----|----|----|----|--------|---------|
| H20FLF | 78 | 56 | 50 | 38 | 33 | G 3/4" | Rp 3/4" |

Features

Watermark and AGA approved

Full bore

100% pressure tested

Sizes at 20mm (3/4")

Blow proof spindle

Swivel nut

Tested and certified to:
WMTS-012 (for Water) | AS4617 (for Gas)

Material Chart

| Part | H20FWLF | H20FGLF |
|----------------|--------------------|-----------------|
| Body | DR Lead Free Brass | Brass |
| Cap | DR Lead Free Brass | Brass |
| Seal | PTFE | PTFE |
| Ball | Stainless Steel | Stainless Steel |
| Spindle | Stainless Steel | Stainless Steel |
| Handle | Aluminium | Aluminium |
| O Ring | FKM | HNBR |
| Washer | BA-U | BA-U |
| Retaining Ring | Stainless Steel | Stainless Steel |

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

