


# SWIVEL NUT BALL VALVE

MI Water Lead Free



## Product Specifications

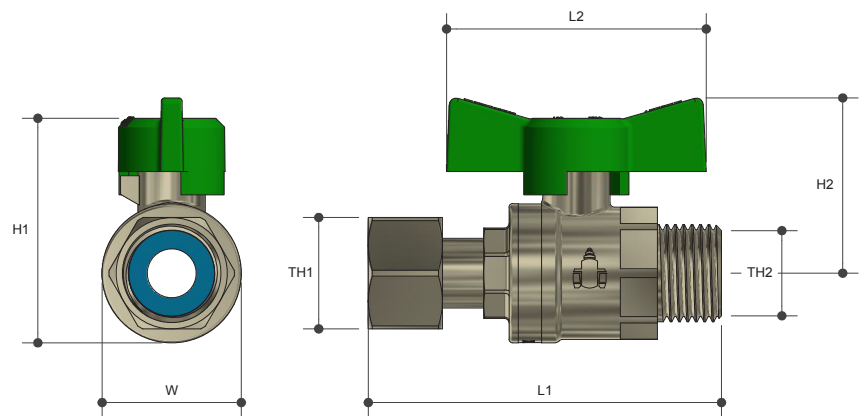

### Specifications

Working temperature 1 °C to 95 °C

Maximum pressure rating 2500kPa

### Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
SN15MWLF	76	56	49	38	30	G 1/2"	G 1/2"
SN20MWLF	77	56	49	38	30	G 3/4"	G 3/4"

### Features

Watermark approved

Full bore

100% pressure tested

Available in sizes 15mm (1/2") to 20mm (3/4")

Blow proof spindle

Swivel nut

Tested and certified to WMTS-012

### Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Aluminium
Retainoing Ring	Stainless Steel
Washer	BA-U

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

