


UNDERGROUND GATE VALVE

FI X FI with Key Cap Lead Free

Product Specifications

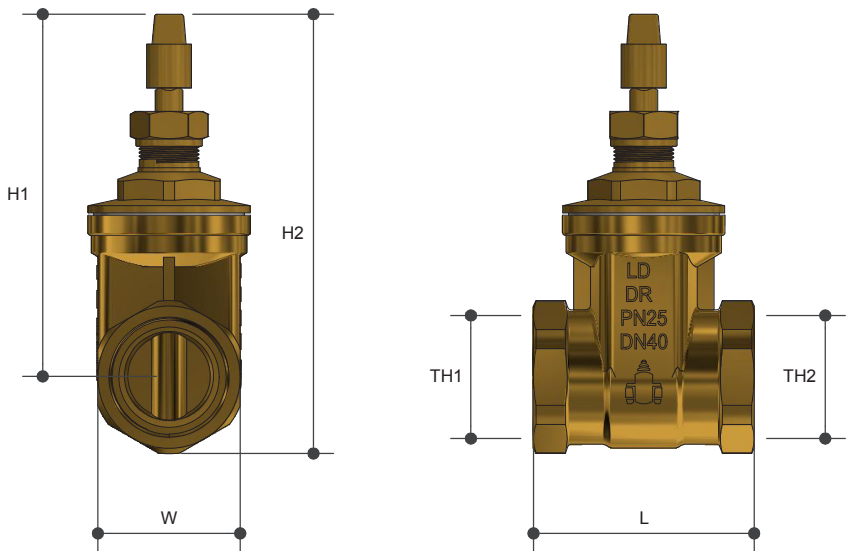

Specifications

Working temperature 1 °C to 95 °C

Maximum pressure rating 2500 KPa

Sizing Chart (MM)

	L	H1	H2	W	TH1	TH2
UGV40LF	88	144	175	57	Rp 1 1/2"	Rp 1 1/2"
UGV50LF	95	160	196	70	Rp 2"	Rp 2"



Features

Watermark approved

Full Bore

100% pressure tested

Available in sizes 40mm (1 1/2") to 50mm (2")

Key Cap Drive

Tested and certified to AS 1628

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Gate	DR Lead Free Brass
Spindle	DR Lead Free Brass
Gland	PTFE
Seal	PTFE
Handle	DR Lead Free Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

