


DUAL APPROVED BALL VALVE

Lever Handle FI X FI Extended Spindle
Lead Free

Product Specifications

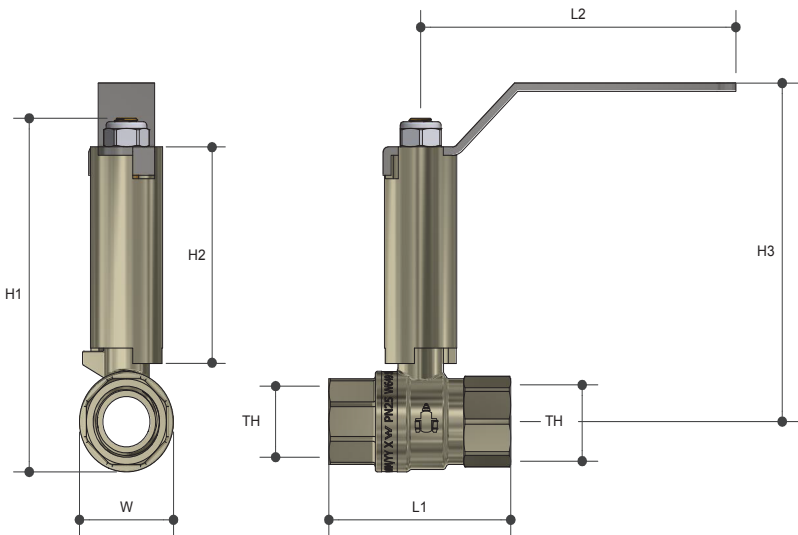

Specifications

Working Temperature
Water: 1 °C to 95 °C | Gas: -20 °C to 120 °C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	H3	W	TH
EXTW15FLF	58	101	105	64.6	101	30	Rp 1/2"
EXTW20FLF	66	101	112	64.6	104	37	Rp 3/4"
EXTW25FLF	81	101	121	64.6	108	46	Rp 1"
EXTW32FLF	91	140	136	66.2	127	58	Rp 1 1/4"
EXTW40FLF	102	140	147	66.2	132	69	Rp 1 1/2"
EXTW50FLF	121	140	163	66.2	141	84	Rp 2"
EXTW65FLF	150	232	226	97.5	193	108	Rp 2 1/2"
EXTW80FLF	177	232	248	97.5	204	130	Rp 3"
EXTW100FLF	212	232	277	97.5	218	160	Rp 4"

Features

Watermark Lead Free and AGA approved

Full Bore

100% pressure tested

Available in sizes 15mm (1/2") to 100mm (4")

Blow proof spindle

Extended Spindle

Tested and certified to:
WMTS-012 (for Water) | AS4617 (for Gas)

Material Chart

Part	Material
Body	DR Brass Lead Free
Cap	DR Brass Lead Free
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Stainless Steel
Spindle Extension	Brass
Handle Extension	Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

