


DUAL APPROVED BALL VALVE

Lever Handle MI X FI Extended Spindle Lead Free

Product Specifications

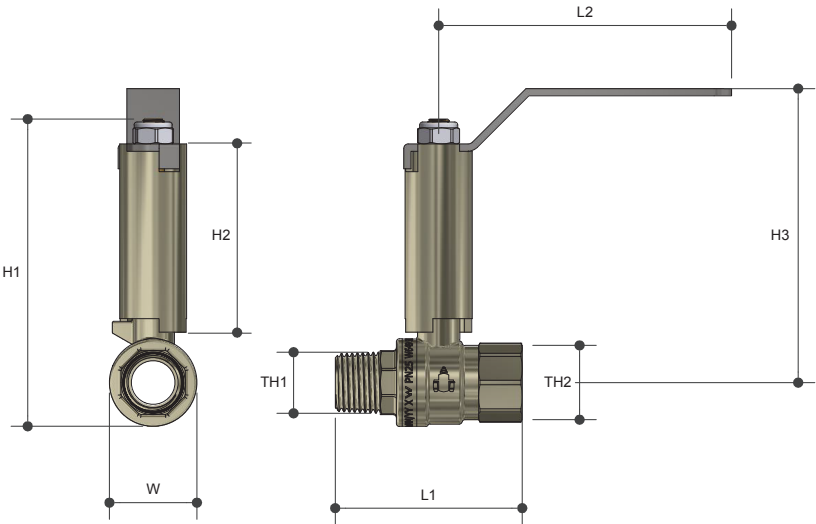

Specifications

Working Temperature
Water: 1°C to 95°C | Gas: -20°C to 120°C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	H3	W	TH1	TH2
EXTW15MLF	63	101	105	64.6	101	30	R 1/2"	Rp 1/2"
EXTW20MLF	73	101	112	64.6	104	37	R 3/4"	Rp 3/4"
EXTW25MLF	87	101	121	64.6	108	46	R 1"	Rp 1"
EXTW32MLF	100	140	136	66.2	127	58	R 1 1/4"	Rp 1 1/4"
EXTW40MLF	113	140	147	66.2	132	69	R 1 1/2"	Rp 1 1/2"
EXTW50MLF	130	140	163	66.2	141	84	R 2"	Rp 2"

Features

- Watermark and AGA approved
- Full Bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 50mm (2")
- Blow proof spindle
- Extended Spindle
- Tested and certified to WMTS-02 and AS4617

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Stainless Steel
Spindle Extension	Brass
Handle Extension	Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

