


DUAL APPROVED BALL VALVE

Butterfly Handle FL X FL Lead Free

Product Specifications

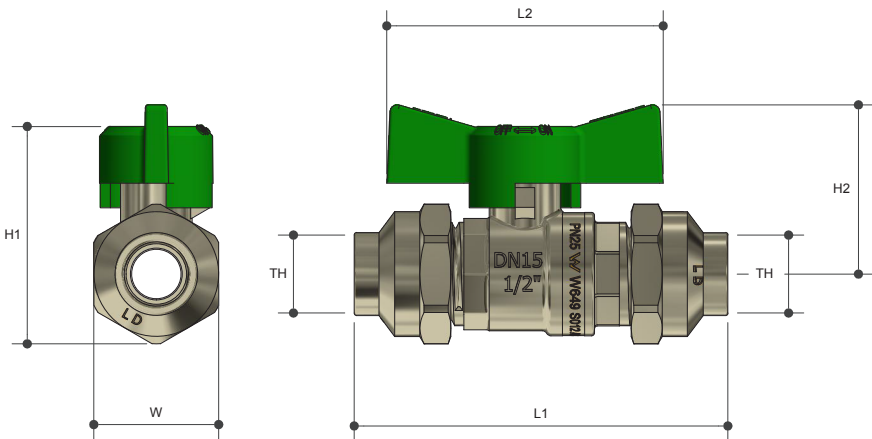

Specifications

Working Temperature
Water: 1 °C to 95 °C | Gas: -20 °C to 120 °C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
G15WLF	78	56	44	34	25	DN15
G20WLF	91	56	49	38	30	DN20

Features

- Watermark and AGA approved
- 100% pressure tested
- Available in sizes 15mm (1/2") to 20mm (3/4")
- Blow proof spindle
- Aluminium handle
- Tested and certified to:
WMTS-012 (for Water) | AS4617 (for Gas)

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Aluminium
Nut	Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

