


WATERMARKED BALL VALVE

Pressfit Extended Lever Handle with Union Connector
Lead Free

Product Specifications

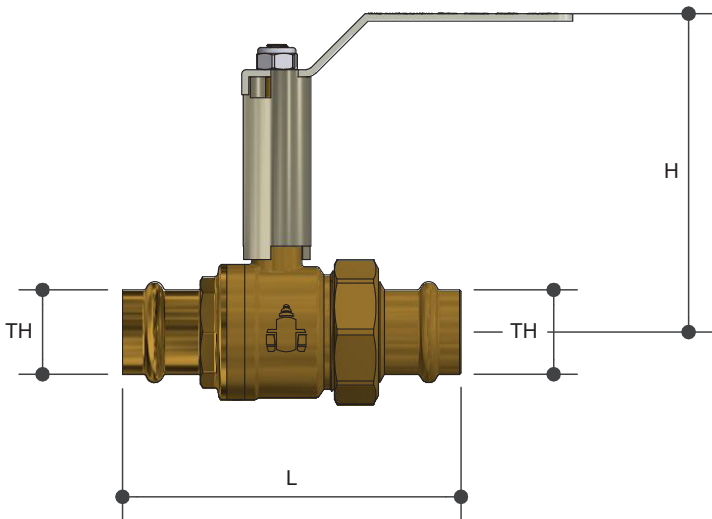

Specifications

Working temperature 1 °C to 95 °C
Maximum pressure rating 2500kPa

Sizing Chart (MM)

	L	H	TH
EXTWDU20LF	101	104	DN20
EXTWDU25LF	115	108	DN25



Features

- Watermark approved
- Full bore
- Available in sizes 20mm (3/4") to 25mm (1")
- 100% pressure tested
- Blow proof spindle
- Removable union for easy connection
- For use with Viega, Rothenberger, Novopress, Kempress, Rems & V-Profile Tools only
- Lead Free Compliant
- Tested and certified to WMTS-012

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Stainless Steel
Spindle Extension	Brass
Handle Extension	Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

