


DUAL APPROVED BALL VALVE

Butterfly Handle FI X FI Lilac Lead Free

Product Specifications

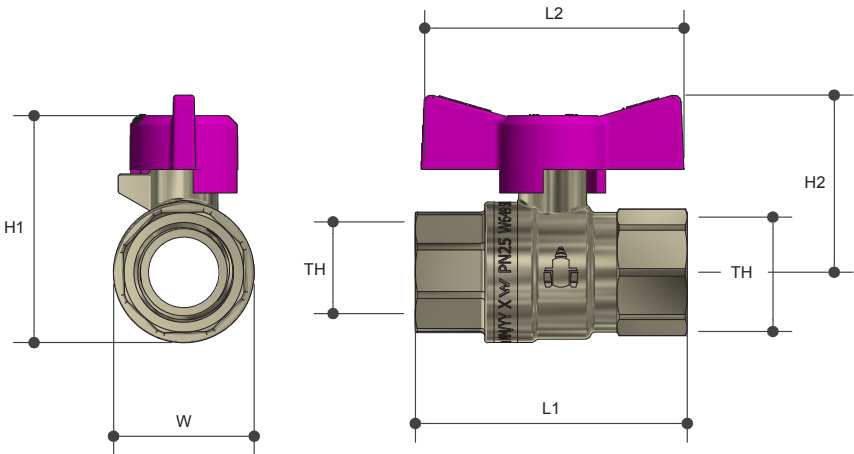

Features

- Watermark and AGA approved
- Full bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 50mm (2")
- Blow proof spindle
- Tested and certified to:
WMTS-012 (for Water) | AS4617 (for Gas)

Specifications

- Working Temperature
Water: 1 °C to 95 °C | Gas: -20 °C to 120 °C
- Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
RWB15FLF	58	56	48	38	30	Rp 1/2"
RWB20FLF	66	56	55	41	37	Rp 3/4"
RWB25FLF	81	56	64	45	46	Rp 1"

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Aluminium

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

