


DUAL APPROVED BALL VALVE

Lever Handle MI X FI Lead Free

Product Specifications

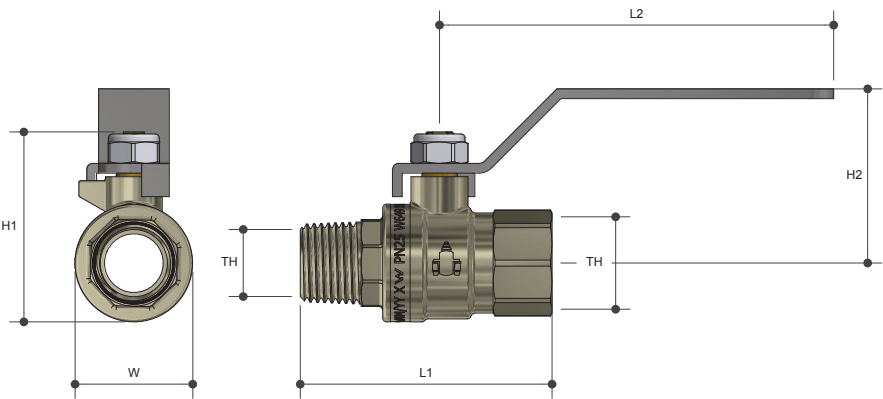

Specifications

Working Temperature
Water: 1°C to 95°C | Gas: -20°C to 120°C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Features

Watermark and AGA approved

Full bore

100% pressure tested

Available in sizes 15mm (1/2") to 50mm (2")

Blow proof spindle

Tested and certified to WMTS-012 and AS4617

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
W15MLF	64	101	48	44	30	R 1/2"	Rp 1/2"
W20MLF	73	101	55	48	37	R 3/4"	Rp 3/4"
W25MLF	87	101	64	52	46	R 1"	Rp 1"
W32MLF	100	140	80	71	58	R 1 1/4"	Rp 1 1/4"
W40MLF	113	140	92	77	69	R 1 1/2"	Rp 1 1/2"
W50MLF	130	140	108	85	84	R 2"	Rp 2"

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Seal	PTFE
Ball	Stainless Steel
Spindle	Stainless Steel
Handle	Stainless Steel
O Ring	FKM

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

