



DUAL APPROVED BALL VALVE

Underground FI X FI Lead Free

Product Specifications

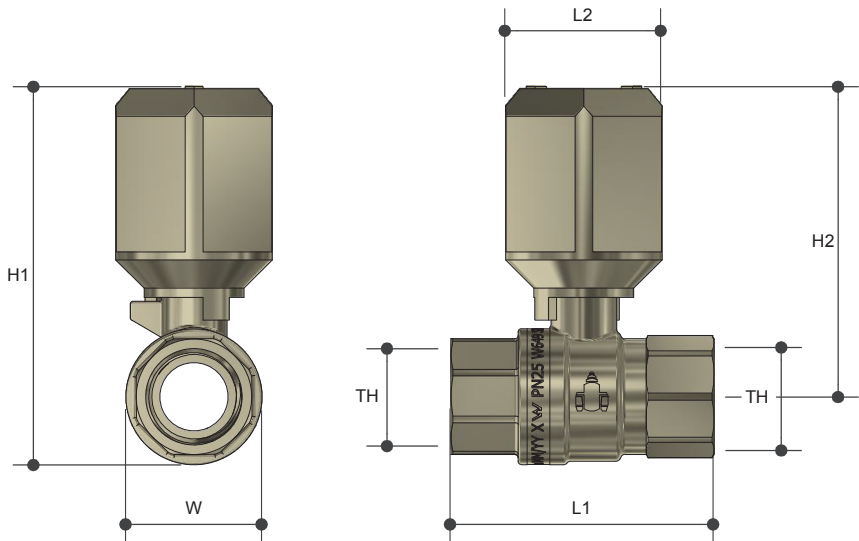

Specifications


Working Temperature
Water: 1°C to 95°C | Gas: -20°C to 120°C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH
UW15FLF	58	27	83	68	30	Rp 1/2"
UW20FLF	66	27	90	71	37	Rp 3/4"
UW25FLF	81	27	101	78	46	Rp 1"
UW32FLF	91	27	112	84	58	Rp 1 1/4"
UW40FLF	102	27	124	89	69	Rp 1 1/2"
UW50FLF	121	27	140	98	84	Rp 2"

Arrow Orientation

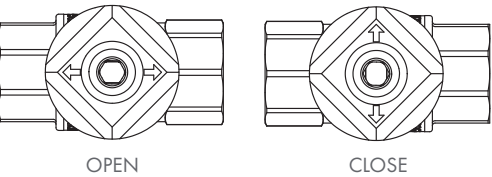

Features

- Watermark and AGA approved
- Full Bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 50mm (2")
- Blow proof spindle
- Suitable for underground installations
- Tested and certified to:
WMTS-012 (for Water) | AS4617 (for Gas)

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	DR Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

