


# DUAL APPROVED BALL VALVE

Butterfly Handle FL X C Lead Free

## Product Specifications

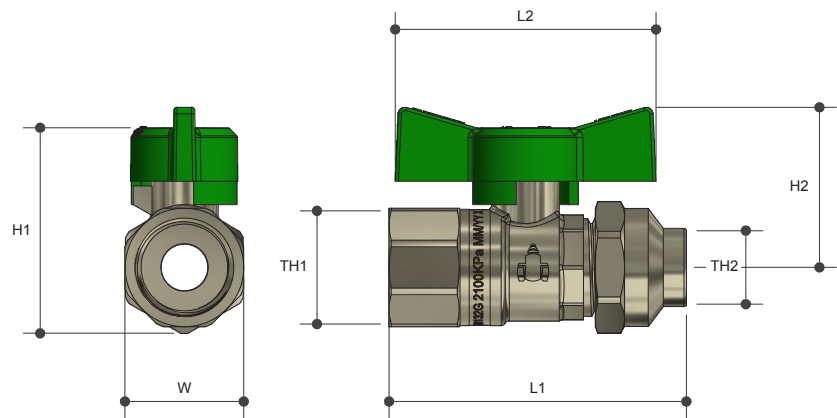

### Specifications

Working Temperature  
Water: 1°C to 95°C | Gas: -20°C to 120°C

Maximum Pressure Rating  
Water: 2500kPa | Gas: 2100kPa

### Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
WB15CLF	64	56	44	34	26	Rp 1/2"	DN15
WB20CLF	76	56	54	38	31	Rp 3/4"	DN20

### Features

- Watermark and AGA approved
- Full bore
- 100% pressure tested
- Available in sizes 15mm (1/2") to 20mm (3/4")
- Blow proof spindle
- Tested and certified to WMTS-012

### Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	DR Lead Free Brass
Seal	PTFE
O Ring	FKM
Handle	Aluminium

For more information on Logi Valve, contact:  
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia  
P. 1300 780 430    F. 1300 780 441    E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

