


WATERMARKED BALL VALVE

Mini Ball Valve FI X FI Lead Free



LOGI
valve

Product Specifications

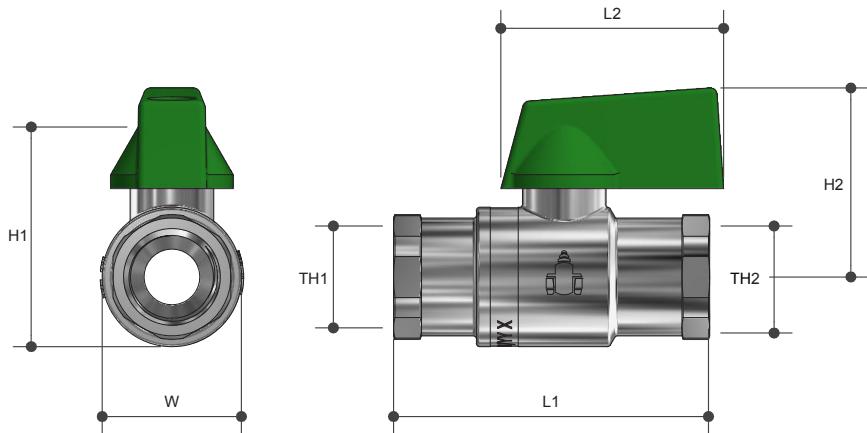

W
Lead Free
AS 4796
WMTS-012
Lic 649

Features

Watermark approved

Full bore

100% pressure tested

Available in sizes from 6mm (1/4") to 20mm (3/4")

Tested and certified to WMTS-012

Specifications

Working temperature 1°C to 95°C

Maximum pressure rating 2500kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
WMBV06HLF	45	32	32	27	20	R 1/4"	Rp 1/4"
WMBV10HLF	45	32	32	27	20	R 3/8"	Rp 3/8"
WMBV15HLF	60	32	32	33	25	R 1/2"	Rp 1/2"

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	Aluminium

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

AN
AUSTWORLD