


DUAL APPROVED BALL VALVE

Underground MI X FI Lead Free

Product Specifications

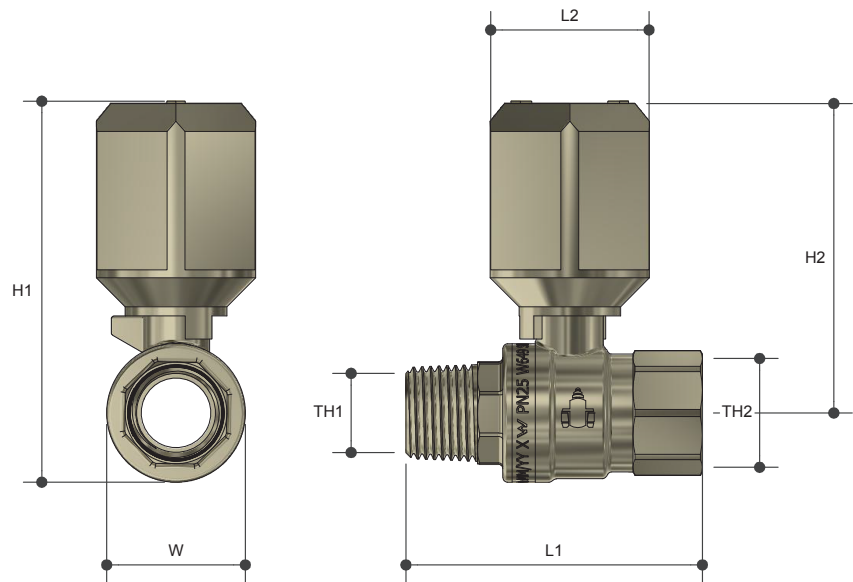

Specifications



Working Temperature
Water: 1 °C to 95 °C | Gas: -20 °C to 120 °C

Maximum Pressure Rating
Water: 2500kPa | Gas: 2100kPa

Sizing Chart (MM)

	L1	L2	H1	H2	W	TH1	TH2
UW15MLF	64	34	83	67	30	R 1/2"	Rp 1/2"
UW20MLF	73	34	89	71	37	R 3/4"	Rp 3/4"
UW25MLF	87	34	96	75	46	R 1"	Rp 1"
UW32MLF	100	34	110	82	58	R 1 1/4"	Rp 1 1/4"
UW40MLF	113	34	122	87	69	R 1 1/2"	Rp 1 1/2"
UW50MLF	130	34	138	96	84	R 2"	Rp 2"

Arrow Orientation

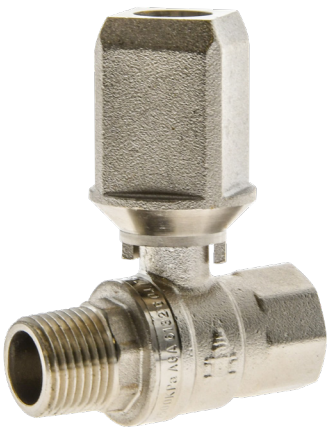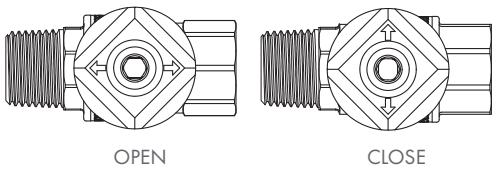

Features

Watermark and AGA approved

Full Bore

100% pressure tested

Available in sizes 15mm (1/2") to 50mm (2")

Blow proof spindle

Suitable for underground installations

Tested and certified to:
WMTS-012 (for Water) | AS4617 (for Gas)

Material Chart

Part	Material
Body	DR Lead Free Brass
Cap	DR Lead Free Brass
Ball	Stainless Steel
Spindle	Stainless Steel
Seal	PTFE
O Ring	FKM
Handle	DR Brass

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

