
WATERMARKED BALL VALVE

Crimp Pex X Pex SDR 7.4 Lever Handle Lead Free

Product Specifications





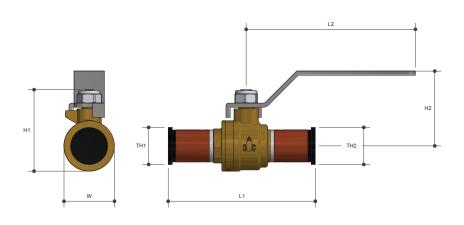

Features

Specifications

Working temperature 1°C to 95°C

Maximum pressure rating 2500kPa

Sizing Chart (MM)

| | L1 | L2 | H1 | H2 | W | TH |
|--------|----|-----|----|----|----|---------------------|
| CW15LF | 87 | 101 | 48 | 44 | 30 | Crimp Pex 1/2" Pipe |
| CW20LF | 96 | 101 | 55 | 48 | 37 | Crimp Pex 3/4" Pipe |

Watermark approved

Full bore

100% pressure tested

Blow proof spindle

Available in sizes 15mm (1/2") to 20mm (3/4")

Stainless Steel handle

Tested and certified to WMTS-012

Material Chart

| Part | Material | | |
|---------|--------------------|--|--|
| Body | DR Lead Free Brass | | |
| Seal | PTFE | | |
| Ball | Stainless Steel | | |
| Bonnet | DR Lead Free Brass | | |
| Spindle | Stainless Steel | | |
| O Ring | FKM | | |
| Handle | Stainless Steel | | |
| Nut | Stainless Steel | | |
| Ring | Copper | | |
| Сар | DR Lead Free Brass | | |
| End Cap | Poly Ethylene | | |

For more information on Logi Valve, contact: Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430 F. 1300 780 441

E. info@austworld.com.au

