


Storage Hot Water Installation Kit 500kPa High Performance

HWKIT-02HP

Product Specifications

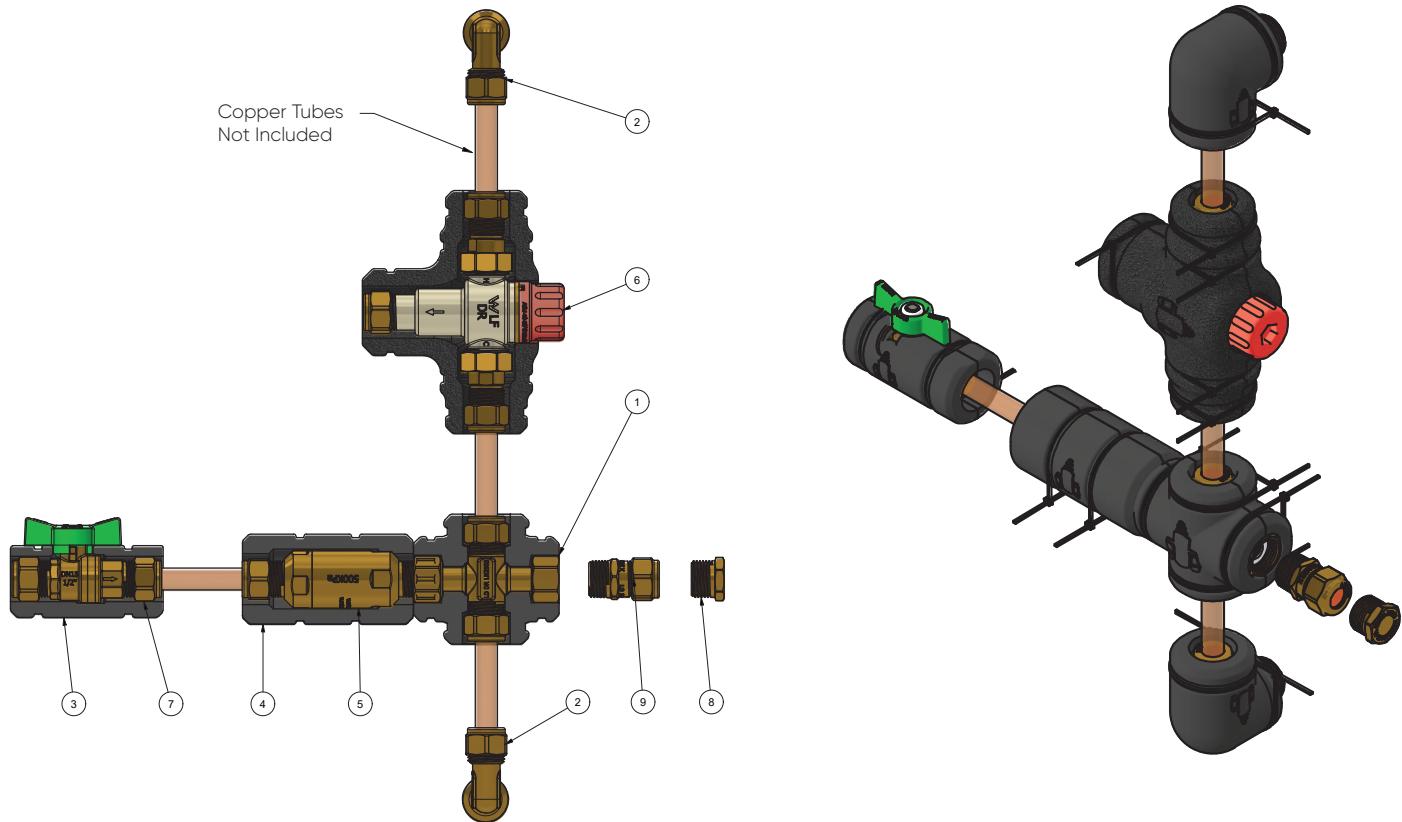

Specifications

Working Temperature: 1°C to 80°C

Maximum Pressure Rating: 1400kPa

Component Chart

Item	Qty	Part Code	Material
1	1	AW419LF	Tee Swivel Nut 15FI x 15FI x 15C x 15C Lead Free
2	2	AW4142LF	Copper Compression Elbow Reducing Extended 20MI x 15C BR Lead Free
3	1	ICDFC15OEM	PU Cover to Suit DFC
4	1	ICP15OEM	PU Cover to Suit PLV
5	1	PLV15C-500LF	Pressure Limiting Valve 500kPa 15MM C x C Lead Free
6	1	TV15HPLF	Tempering Valve 15MM High Performance Lead Free
7	1	WDFC15LF	Dual Isolation Non Return Ball Valve with Check Valve Copper Compression Lead Free
8	1	AW711NBLF	Hexagonal Plug Brass 15mm BSPP Lead Free
9	2	AW2110NBLF	Copper Compression Union Brass 15MI x 15C Lead Free

Features



Lead Free Watermark approved

Integral Non Return and Isolation function

Suitable for horizontal and vertical installation

Protection of hot water system components, domestic applications and general plumbing works

Insulation jacket provided as per AS3500.4

Tested and certified to:

AS4032.2 | WMTS 012 | AS1357 | AS3688

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia

P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

