


DRY METER TAPPING KIT

Flared Compression Lockable DN20 Lead Free TK20MLF

Product Specifications

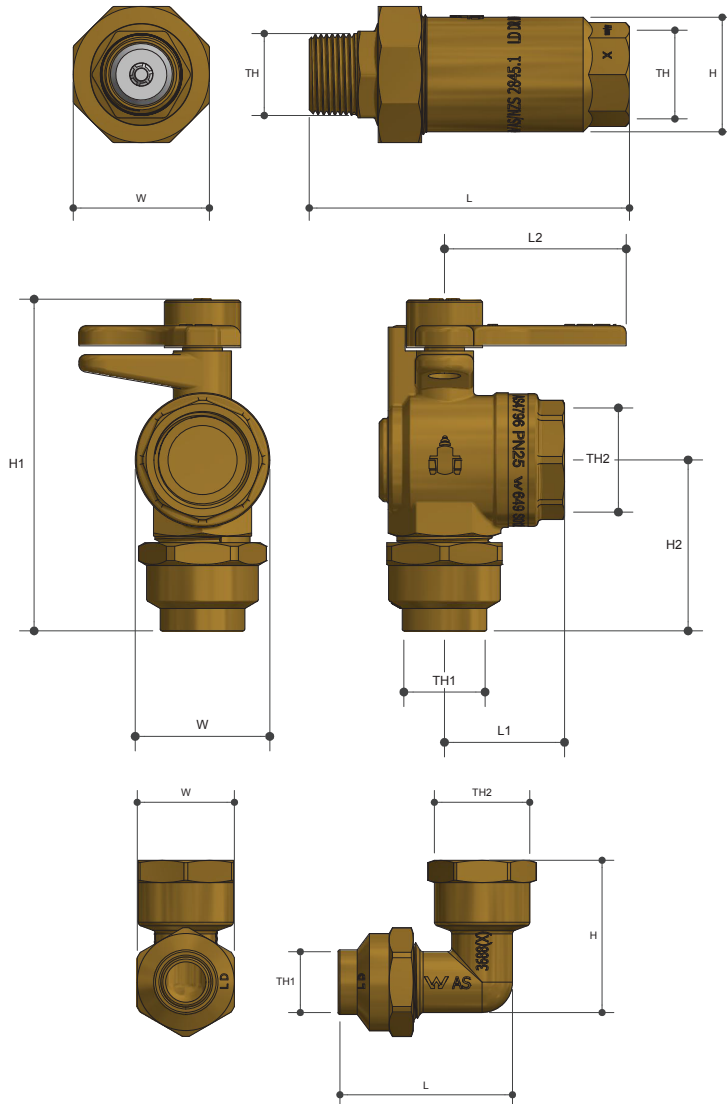

Lead Free

AS 4796
WMTS 012
Lic 649

AS 3688
Lic 2503

AS 2845.1
Lic 21058

Specifications

Working temperature 1 °C to 60 °C

Max. pressure rating 1200kPa

Features

Watermark Lead Free Approved

DR Lead Free Brass

Protects against backflow and siphonage

Suitable for Vertical and Horizontal Installation

100% factory tested

Integral filter

Easy installation using quality brass press fittings

Sizing Chart (MM)

| TK20MLF | L | H | W | TH1 | TH2 |
|----------|-----|----|----|--------|---------|
| AW227LF | 56 | 38 | 32 | 20C | R 3/4" |
| DOV20MLF | 104 | 37 | 44 | R 3/4" | Rp 3/4" |

| | L1 | L2 | H1 | H2 | W | TH1 | TH2 |
|---------|----|----|----|----|----|------|---------|
| WRA20LF | 33 | 50 | 91 | 47 | 37 | DN20 | Rp 3/4" |

For more information on Logi Civil, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018.
Austworld and Logi Civil are registered trade mark belonging to Austworld Pty Ltd.

